

38883 8-
Pella

VENETIAN BLINDS

offer

COLOR TONES

of

Today

Pella offers color toning to blend with any decorating scheme. The attractive selection of slat colors brings a beauty range to window treatment. Tape selections offer a blend with the furnishings or a color highlight. Smooth enamel finishes are three coated on Pella wood slat blinds. Metal slats have baked enamel finishes—smooth as glass. All these durable finishes are applied in Pella's own plant for uniform quality control.

ROLSCREEN COMPANY

PELLA, IOWA

STANDARD SLAT COLORS


Flexible aluminum—flexible steel and rigid aluminum metal slats are available with baked enamel finish in the six colors marked (*).




No. 1 Clear Varnish



No. 15 Soft Yellow

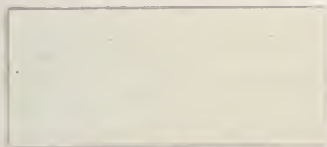

(*) No. 2 White

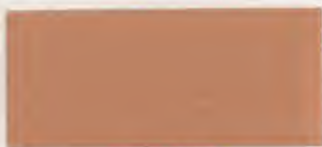

No. 17 Rose




No. 10 English Ivory



No. 8 Light Olive



No. 5 Peachskin



No. 20 Oyster White



(*) No. 23 Pastel Green



(*) No. 40 Ivory



(*) No. 9 Arctic Grey



(*) No. 60 Ivory



(*) No. 12 Wedgewood Blue



No. 80 Ivory

STANDARD TAPE AND CORD COLORS

Duplex tapes are offered in colors named in supplementary tape bulletin. Cords are available in colors marked (*).



No. 1 Mingled



(*) No. 15 Rust




(*) No. 2 White



(*) No. 17 Rose



(*) No. 5 Ivory



(*) No. 18 Alice Blue



No. 7 Peachskin



(*) No. 19 Apple Green



(*) No. 8 Chocolate



(*) No. 21 Duck



(*) No. 11 Mulberry



(*) No. 50 Red



No. 12 Brown Mingled



(*) No. 52 Blue

Note: Black tape also available—Color No. 6


GENERAL INFORMATION

MEASURING INSTRUCTIONS

All Pella blinds are made to measure, and can be installed either inside the opening (between stops or jambs), or on the face of the casing. Suitable brackets should be selected from illustrations on page five of the price list, and ordered by number.

Dimensions should be taken at "A," "B" or "C" as indicated on illustration below. For face of casing installations we recommend adding a minimum of 3" overall (1½" on each side) to the actual opening width taken from jamb to jamb, in determining the blind width. On face installations the slats will be cut same length as head members unless otherwise specified.

DIMENSIONS

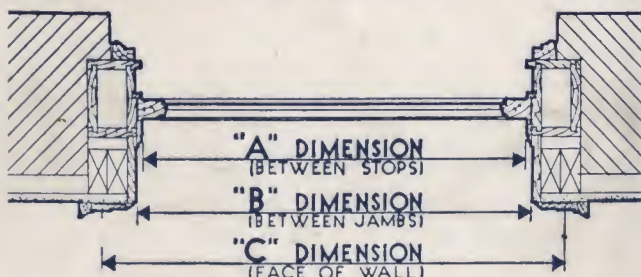

In ordering, specify in "type" column whether dimensions are taken at "A," "B," or "C" and list these dimensions in "Blind Width" column. This will determine head member length. Slats will be cut ¼" less on each side for "A" and "B" installations, and same length as head member for "C" installations. On guided blinds, head member length and width dimension to outside edges of guides will be the same, and proper allowance for slat length will be made at the factory.

For height dimension, measure from what will be the top of the blind housing to what will be the bottom of the blind.

In addition to width and height, also give approximate distance from floor to top of sill so operating and tilting ropes may be furnished in proper lengths.

Specify whether installation is on wood, steel or plaster.

BUNDLE SIZES

Approximate size of bundle including housing and bottom rail when blind is raised.

						RIGID
Blind	3"	2 ³ / ₈ "	2"	1 ³ / ₄ "	Steel	Alum.
Height	Slats	Slats	Slats	Slats	Slats	Slats
36"	5 ¹ / ₂ "	6"	6 ¹ / ₂ "	7"	3 ³ / ₄ "	4"
48"	6 ¹ / ₄ "	7"	7 ³ / ₄ "	8 ¹ / ₄ "	4 ¹ / ₄ "	4 ¹ / ₂ "
60"	7"	8"	9"	9 ¹ / ₂ "	4 ³ / ₄ "	5"
72"	8"	9"	10 ¹ / ₂ "	11 ³ / ₄ "	5 ¹ / ₄ "	5 ¹ / ₂ "
84"	9"	10"	11 ³ / ₄ "	13"	5 ³ / ₄ "	6 ¹ / ₄ "
96"	9 ³ / ₄ "	11"	13 ¹ / ₄ "	14 ¹ / ₄ "	6 ¹ / ₄ "	7 ¹ / ₄ "
108"	10 ¹ / ₂ "	12"	14 ³ / ₄ "	15 ¹ / ₂ "	6 ³ / ₄ "	8"
120"	11 ¹ / ₂ "	13"	16"	16 ³ / ₄ "	7 ¹ / ₂ "	8 ¹ / ₂ "

GENERAL INFORMATION

MEASURING INSTRUCTIONS

All Pella blinds are made to measure, and can be installed either inside the opening (between stops or jambs), or on the face of the casing. Suitable brackets should be selected from illustrations on page five of the price list, and ordered by number.

Dimensions should be taken at "A," "B" or "C" as indicated on illustration below. For face of casing installations we recommend adding a minimum of 3" overall (1½" on each side) to the actual opening width taken from jamb to jamb, in determining the blind width. On face installations the slats will be cut same length as

Digitized by:



ASSOCIATION FOR PRESERVATION TECHNOLOGY
www.apti.org

For the

BUILDING TECHNOLOGY HERITAGE LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:



SOUTHEASTERN ARCHITECTURAL ARCHIVE
SPECIAL COLLECTIONS
HOWARD-TILTON MEMORIAL LIBRARY

<http://seaa.tulane.edu>

Blind Height	3" Slats	2 3/8" Slats	2" Slats	1 3/4" Slats	Steel Slats	Alum. Slats
36"	5 1/2"	6"	6 1/2"	7"	3 3/4"	4"
48"	6 1/4"	7"	7 3/4"	8 1/4"	4 1/4"	4 1/2"
60"	7"	8"	9"	9 1/2"	4 3/4"	5"
72"	8"	9"	10 1/2"	11 3/4"	5 1/4"	5 1/2"
84"	9"	10"	11 3/4"	13"	5 3/4"	6 1/4"
96"	9 3/4"	11"	13 1/4"	14 1/4"	6 1/4"	7 1/4"
108"	10 1/2"	12"	14 3/4"	15 1/2"	6 3/4"	8"
120"	11 1/2"	13"	16"	16 3/4"	7 1/2"	8 1/2"